

Date:	Project Name:
Type:	Part Number:



T5 TYPE B



FEATURES

- Built-in safety switch prevents electrical shock during installation
- Operates directly on 120-347V line voltage
- Direct replacement for T5/HO Fluorescent Lamp Rated for use in fully enclosed fixtures.
- Suitable for use in dry and damp locations
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment
- Operating temperature: -4°F to +113°F (-20°C to +45°C)
- CRI >83
- Rated Lifetime L70(hrs): >50,000
- 7 year warranty

APPLICATIONS

- Food Service Equipment
- Office Lighting
- Residential
- Retail Lighting




Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	SIZE	VOLTAGE (V)	LUMENS	BASE TYPE	BEAM ANGLE	CCT (K)
R42125	RENO-LEDT5BP-13W-MCCT-48G	13W	4FT	120-347V	1600 lm	G5	330°	3000K
					1650 lm			3500K
					1700 lm			4000K
					1700 lm			5000K
					1650 lm			6500K
R42121	RENO-LEDT5BP-25W-MCCT-48G	25W	4FT	120-347V	3300 lm	G5	330°	3000K
					3450 lm			3500K
					3500 lm			4000K
					3600 lm			5000K
					3400 lm			6500K

DIMENSIONS


4FT

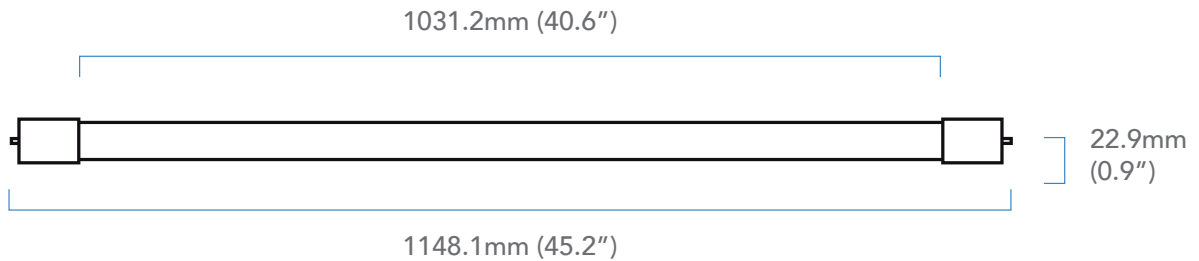

Date:	Project Name:
Type:	Part Number:


PROTECTION FEATURES

INTERNAL SAFETY SWITCH

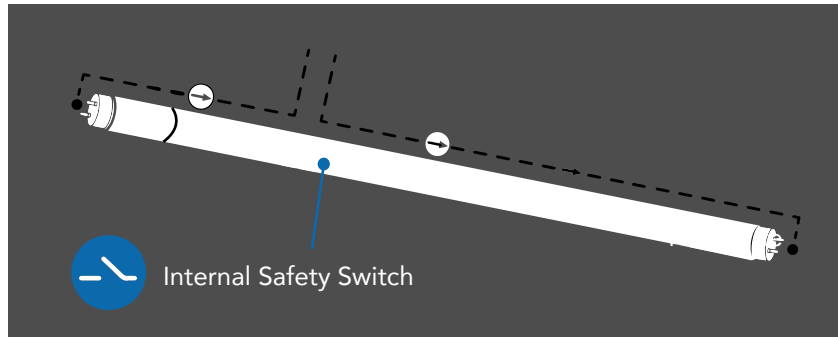

Internal Safety Switch for installation protection.
(No current will flow until pins on both ends are engaged)

MISUSE PROTECTED FUNCTION

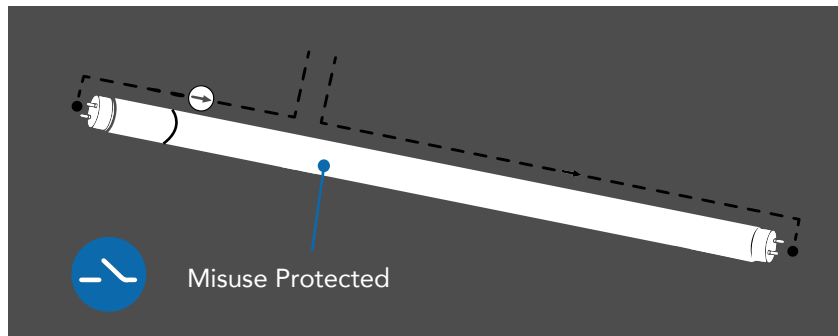


Misuse - Protected function if forgot to by-pass the ballast, the lamp won't work, no risk of fire or cap melting.

DOUBLE-ENDED WIRING DIAGRAM

- Cut all existing connections to ballast as shown below and remove ballast.
See Figure A above for typical ballast configurations.
 - Re-wire fixture as shown below. For Double-ended wiring, use either shunted or nonshunted lampholders.
- Note:** There should not be any exposed wires at the end of installation.

Shunted Lampholders

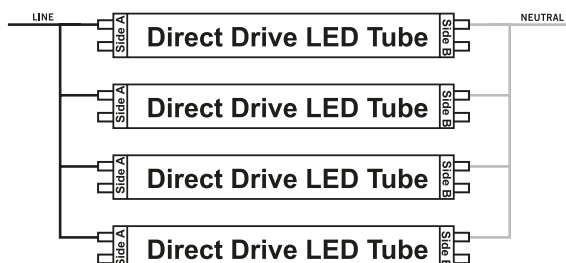

Nonshunted Lampholders

