

Date:	Project Name:
Type:	Part Number:



MAKO SERIES

LED VAPOR TIGHT STRIP




DESCRIPTION

Reno Lighting's ECO Vapor Tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP66 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

FEATURES

- DLC Standard
- 0-10V dimming control compatible
- Surface & Suspended Mounting options via supplied clamps inside the fixture body
- Operating temperature: -40°F to +122°F (-40°C to +50°C)
- Protection Grade IP66
- One-piece polycarbonate housing body and frosted polycarbonate lens
- Suitable for Wet location
- CRI >80
- Rated Lifetime L70(hrs): >70,000
- 5 year warranty

APPLICATIONS

-  Low Bay Application
-  Parking Garage
-  Stairwell



Date:	Project Name:
Type:	Part Number:

SPECIFICATION

ORDER#	MODEL#	WATTS	VOLTAGE (V)	HOURS RATING	DIMMABLE	LUMENS	CCT (K)
R33118	RENO-LVP2-DV-MW-MCCT-ECO	20/25/35W	120-347V	70,000	0-10V	2626/3283/4596 lm	35/40/50K
R33116	RENO-LVP4-DV-MW-MCCT-R1-ECO	25/35/45W	120-347V	70,000	0-10V	3388/4743/6098 lm	35/40/50K
R33117	RENO-LVP4-DV-MW-MCCT-R2-ECO	50/60/66W	120-347V	70,000	0-10V	6715/8058/8864 lm	35/40/50K

ACCESSORIES OPTIONS

ORDER#	MODEL#	DESCRIPTION
R39204	RENO-RP	LED suspension kit
R83004	RENO-EM-C08	Emergency LED Driver



RENO-RP



RENO-EM-C08

Date:	Project Name:
Type:	Part Number:

RENO SMART NLC SYSTEM ACCESSORIES

ORDER#	MODEL#	DESCRIPTION
R75001	RENO-RS-JK-BPDN-12V	Bluetooth 3.5mm Jack PIR Sensor for RENO Smart NLC System
R75002	RENO-RS-JK-BMWM-12V	Bluetooth 3.5mm Jack Microwave Sensor for RENO Smart NLC System
R75103*	RENO-RS-JK-AD-CORD-L	Hardwire Adjustable "L" Angle Adaptor for 3.5mm Jack Sensors
R75201	RENO-RS-GW-BCNW	Ceiling Mounted Gateway for RENO Smart NLC System
R75302	RENO-RS-RC-BNNG	7-Key Smart Wall Switch for RENO Smart NLC System
R75301	RENO-RS-RC-BNNG	5-Key Reset Remote (*Requires R75103)



RENO-RS-JK-BPDN-12V



RENO-RS-JK-BMWM-12V



RENO-RS-JK-AD-CORD-L



RENO-RS-GW-BCNW



RENO-RS-RC-BNNG



RENO-RS-RC-BNNG

STANDALONE SENSOR

ORDER#	MODEL#	DESCRIPTION
R74002	RENO-SENSOR-PIR-H-EX	For external mounting when installed above 13FT





RENO-SENSOR-PIR-H-EX

Date:	Project Name:
Type:	Part Number:

DIMENSIONS

2FT

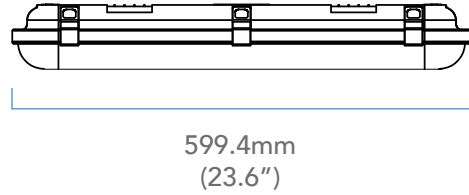

4FT

