



## LED WALL PACK

MODEL# WP1-80

Core's new slim-line wall packs combine exceptional value, contemporary design and flexible mounting options. These fixtures can be used as flood lights and pole mounted lights allowing the same consistent look to be used throughout the installation.

### ACCESSORIES



TL-WMB-ASF - Adjustable Slipfitter  
For TL-WMB501/801




Straight Slipfitter TL-WMB-SSF  
For TL-WMB501/801


### PRODUCT DATA

Wattage	80W
Rated Luminous Flux	6000
Voltage	100-277V
Colour Temp.(CCT)	5000K
Colour Designation	Daylight White
CRI	≥80
Finish	BROWN
Beam Angle	140°
weight (lbs)	11
Rated Life	50000 hrs

### PRODUCT DIMENSIONS

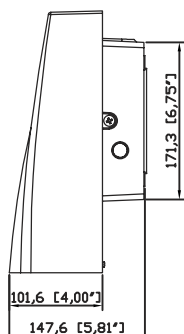

### PHOTOMETRICS

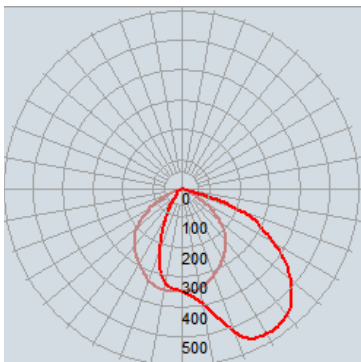

- Industry leading chips from CREE
- COB Technology
- Input voltage: 120-277V
- Colour Temperature: 5000K
- Temperature Range: -20 to +40 C
- Heavy duty wall gasket.
- IP65 rated
- DLC Certified for 50,000 hours
- CRI >82