

## UFO Highbay ECO

### INSTRUCTION MANUAL

- Thank you for purchasing our UFO Highbay. Please read the below articles carefully to see how to use this product safely.
- Warning contents and attention contents related to product safety use, please be sure to follow it.

#### ⚠ Warning

- This UFO High bay within the input voltage range:120-347VAC,50/60Hz.
- If input voltage exceeds this range, it may cause light failure. Please be sure to operate under correct input voltage.
- Ensure ambient operating temperature of -40°F(-40°C) through 122°F(50°C).
- Using this UFO High bay in temperatures outside of this range will reduce the UFO High bay lifespan.
- Make sure to turn off power before starting the installation process.

#### ⚠ Attention

- IP rating: IP65, can work under wet locations.
- Please keep the UFO High bay away from any corrosive substance. When you clean it, please use damp or dry cloth.

SKU	RENO-HBU-150W-DV-XK-R1-ECO	RENO-HBU-240W-DV-XK-R2-ECO
Input Voltage	AC120-347V	
Frequency	50/60HZ	
Power	100W/125W/150W	150W/200W/240W
Input current	0.92A/1.15A/1.38A	1.38A/1.83A/2.2A
CCT	XK can be "3K", "4K", "5K"	

\*XK" represents CCT, for example: 3K=3000K.

### Installation Instruction

Hook type:




### Product Dimension

Unit:mm




Hook:

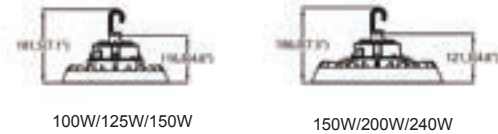


### Watts selected Operation Manual:

#### LOW/MID/HIGH (Minimum / Middle / Maximum wattage)

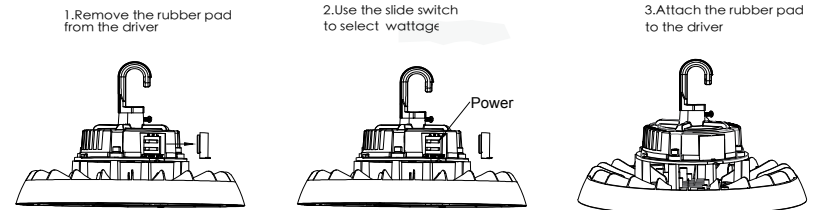


### Wiring Connection

Turn off the power, connect AC wire, black wire to L, white wire to N, and green wire to E. Connect wires as below, Purple wire is DIM+, Pink wire is DIM-, Black/White wire is 12V+.



### Twist in sensor installation manual


1. Take out cover cap.
2. Twist in sensor.

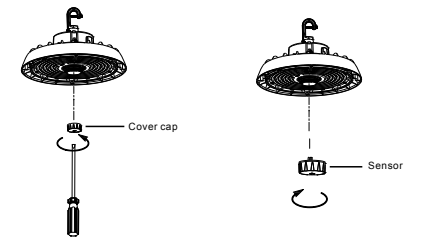

3. Finished installation.



#### Wiring Diagram



**Tip: The above content is for reference only, please take the real thing as the criterion.**

The Installation must be carried out by a qualified electrician.