



### **DESCRIPTION**

The CS2 Series Commercial Strip fixtures are ideal for use in stairwells, common areas, and utility rooms. Its acrylic diffuser provides even, low glare light, and its exceptionally long life reduces maintenance costs. With 0-10V dimming and a high efficacy that meets today's stringent standards, these fixtures are the best solution if you are looking for dependable illumination in commercial conditions that bring maximum energy savings. Installation options include ceiling and wall mounting, making it versatile for any application.

### **POPULAR APPLICATIONS**










**COMMON AREAS UTILITY ROOMS** 

# PRODUCT DIMENSIONS / PHOTOMETRIC SPECS / ILLUMINANCE AT A DISTANCE

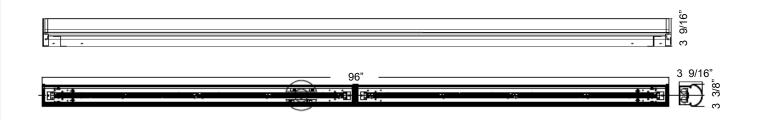





## **TECHNICAL DATA**

LIGHT SPECIFICATIONS			
Lumens	11,440		
Efficacy	131 lm/W		
CCT	4000K		
CRI	≥80		
Replaces	1 X 2-LAMP 8-FOOT T12 HO		
Dimmable	0-10V		
DRIVER			
Driver Type	Constant Current		
Driver Output	30-45V		
Class 2 Driver	UL1310 Class 2		
HOURS			
Rated Hours	50,000		

ELECTRICAL		TEMPERATURE	
Wattage	90W	Minimum Start	-20°C
System Watts	88W	Ambient Temp	50°C
Input Voltage	120-277V	DIMENSIONS &	WEIGHT
THD	<20%	Dimensions	96" x 3 <sup>3</sup> / <sub>8</sub> " x 3 <sup>9</sup> / <sub>16</sub>
Power Factor	0.90	Weight	5.6 KGS
CONSTRUCTION		APPROVALS & LISTINGS	
Housing Material	Powder Coated Galvanized Steel	cUL	IFAM7.E473127
Lens Material	Acrylic (PMMA)	DLC Listed	Pending
Damp Location Rated	Yes	IESNA	LM-79 & LM-80
LED CHIP			
Chip Brand	SEOUL SEMICONDUCTOR		
Chip Type	SMD 3528		