



DESCRIPTION

The FP3 Series LED FLAT PANEL ceiling light is a high performance, commercial grade solution suitable for offices, hospitals, schools, and so much more. Fully dimmable, requiring no warm-up, and producing very little heat, it is an efficient replacement for traditional fluorescent lighting.

OPTIONAL ACCESSORIES



AIRCRAFT CABLES
AC-14



SURFACE MOUNT KIT
SMK-14

POPULAR APPLICATIONS



SCHOOLS



OFFICES








HOSPITALS



OPEN CEILINGS

PRODUCT DIMENSIONS

PHOTOMETRIC SPECS/ILLUMINANCE AT A DISTANCE

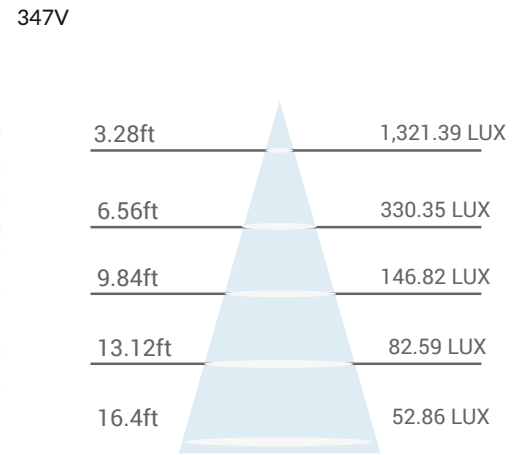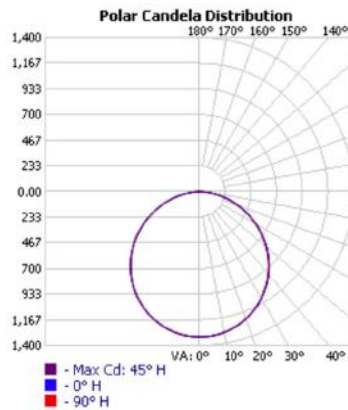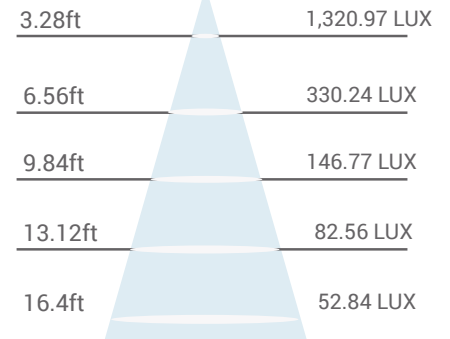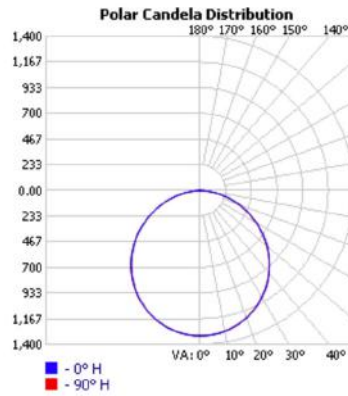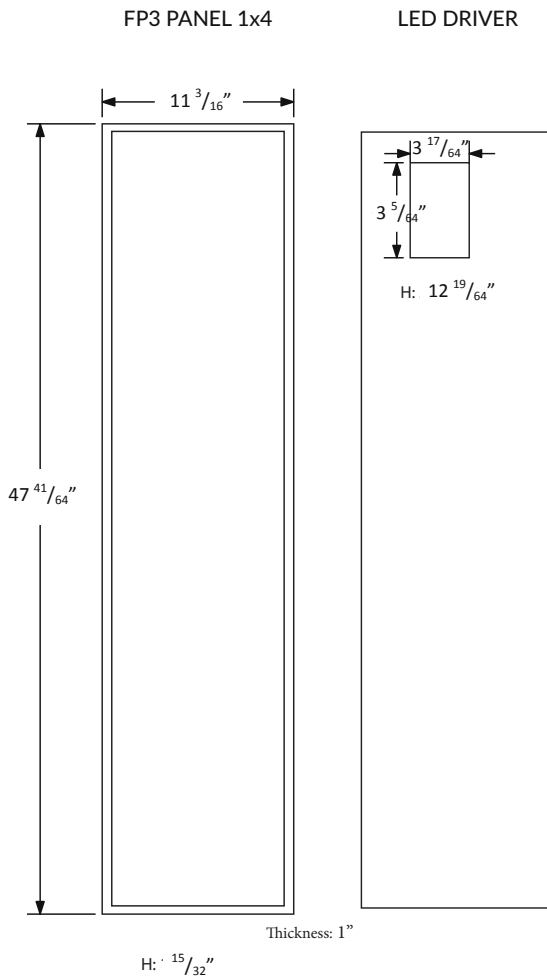

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	3825.1
Efficacy	125.04 lm/W
CCT	3500K
CRI	≥82.5
Effective Beam Angle	120°

DRIVER

Driver Type	Constant Current
Driver Output	27-42V
Dimmable	Yes
Dimming Type	0-10V

HOURS

Rated Hours	50,000
-------------	---------------

ELECTRICAL

Wattage	30W
System Watts	30.59W
Input Voltage	100-347V
THD	19.62%

CONSTRUCTION

Housing Material	Powder Coated Aluminum Galvanized Steel
Lens Material	Acrylic

LED CHIP

Chip Brand	JFO
Chip Type	SMD2835

TEMPERATURE

Minimum Start	-20°C
Ambient Temp	50°C

DIMENSIONS & WEIGHT

Dimensions	$11 \frac{3}{16}'' \times 47 \frac{41}{64}'' \times 1''$
Weight	4.53 KGS

APPROVALS & LISTINGS

ETL	UL-1598 CAN/CSA-C22.2 No. 250.0
DLC Listed	PL4J7MWS9E28
IESNA	LM-79 & LM-80