




LED FLAT PANEL

2x2 / 3500K
30W / 100-347V
#FP3-2230P-35

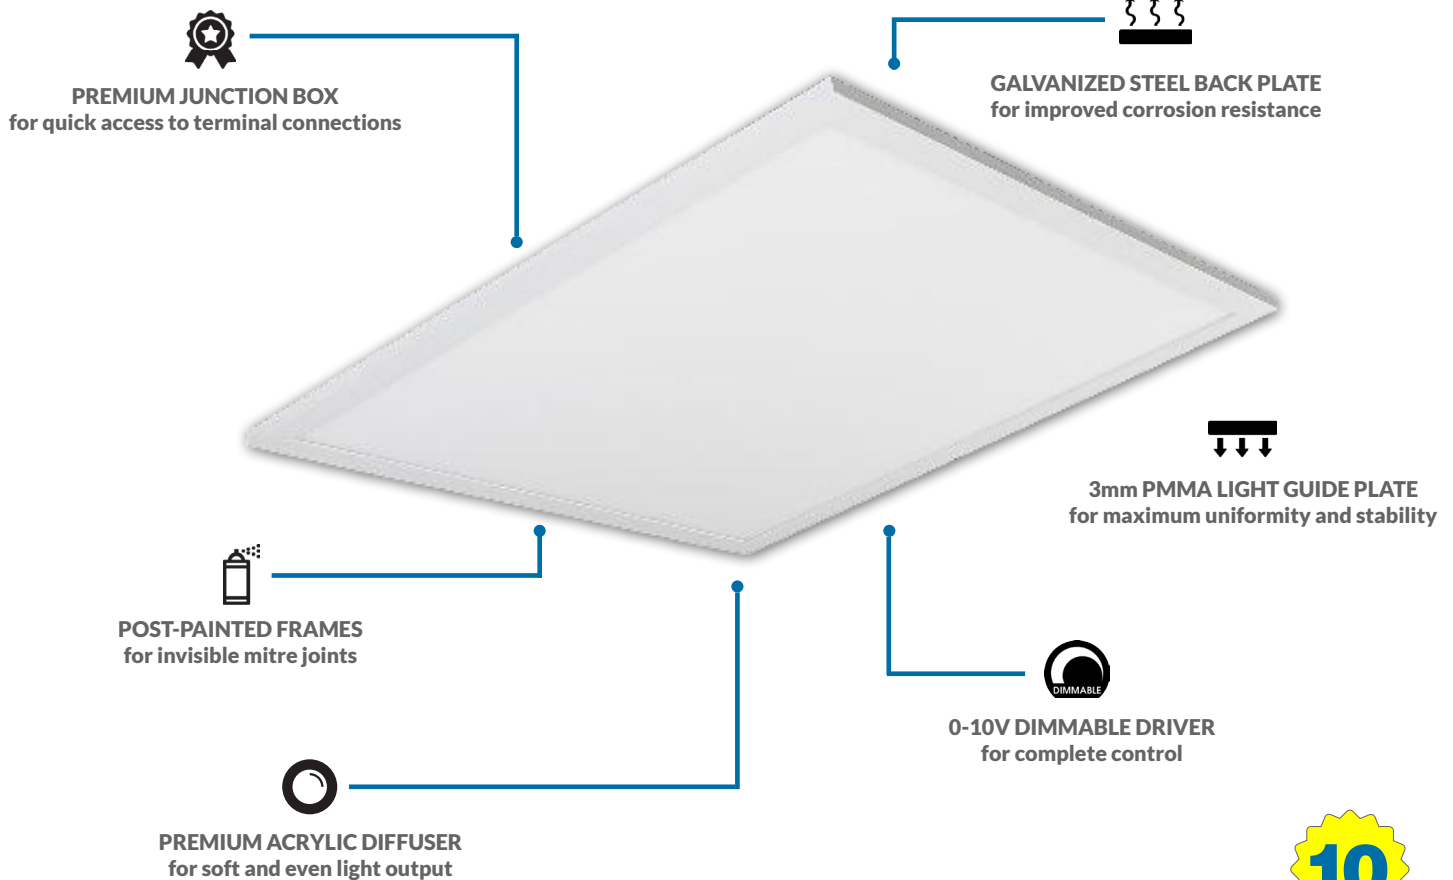

DESCRIPTION

The FP3 Series LED FLAT PANEL ceiling light is a high performance, commercial grade solution suitable for offices, hospitals, schools, and so much more. Fully dimmable, requiring no warm-up, and producing very little heat, it is an efficient replacement for traditional fluorescent lighting.

OPTIONAL ACCESSORIES



AIRCRAFT CABLES
AC-14



SURFACE MOUNT KIT
SMK-14



SCHOOLS



OFFICES



HOSPITALS




OPEN CEILINGS


POPULAR APPLICATIONS

PRODUCT DIMENSIONS

FP3 PANEL 2x2


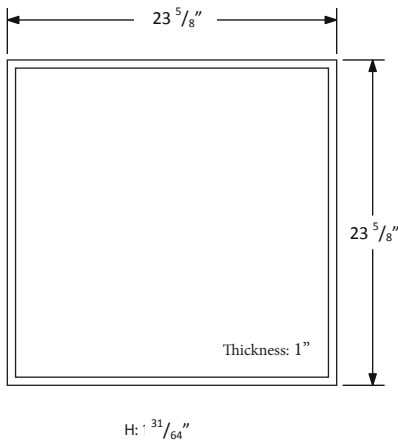


LED DRIVER


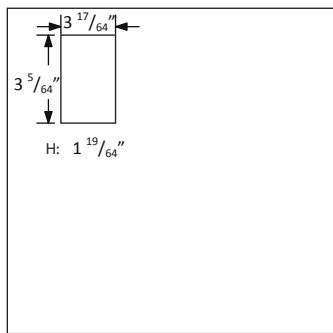


PHOTOMETRIC SPECS/ILLUMINANCE AT A DISTANCE

100-277V

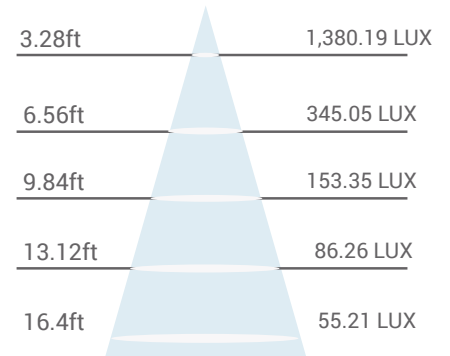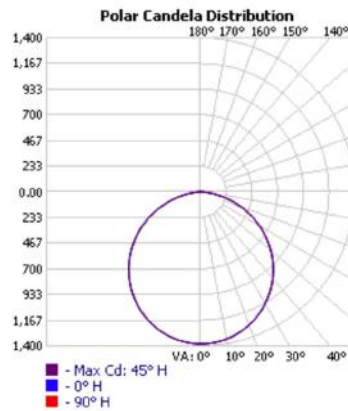

347V

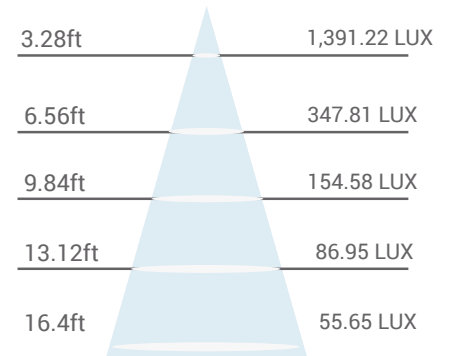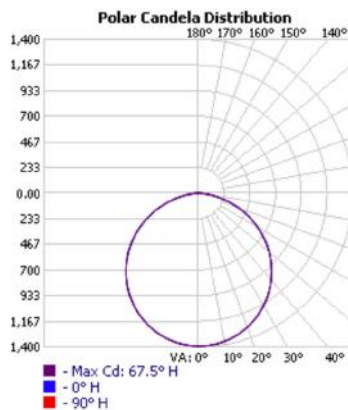

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	3955
Efficacy	125.68 lm/W
CCT	3500K
CRI	≥82.5
Effective Beam Angle	120°

DRIVER

Driver Type	Constant Current
Driver Output	27-42V
Dimmable	Yes
Dimming Type	0-10V

HOURS

Rated Hours	50,000
-------------	--------

ELECTRICAL

Wattage	30W
System Watts	31.47W
Input Voltage	100-347V
THD	18.49%

CONSTRUCTION

Housing Material	Powder Coated Aluminum Galvanized Steel
Lens Material	Acrylic

LED CHIP

Chip Brand	JFO
Chip Type	SMD2835

TEMPERATURE

Minimum Start	-20°C
Ambient Temp	50°C

DIMENSIONS & WEIGHT

Dimensions	23 ⁵ / ₈ " x 23 ⁵ / ₈ " x 1"
Weight	4.53 KGS

APPROVALS & LISTINGS

ETL	UL-1598 CAN/CSA-C22.2 No. 250.0
DLC Listed	PL053ZCK1ICB
IESNA	LM-79 & LM-80