




LED FLAT PANEL

2x4 / 4000K
40W / 100-347V
#FP3-2440P-4

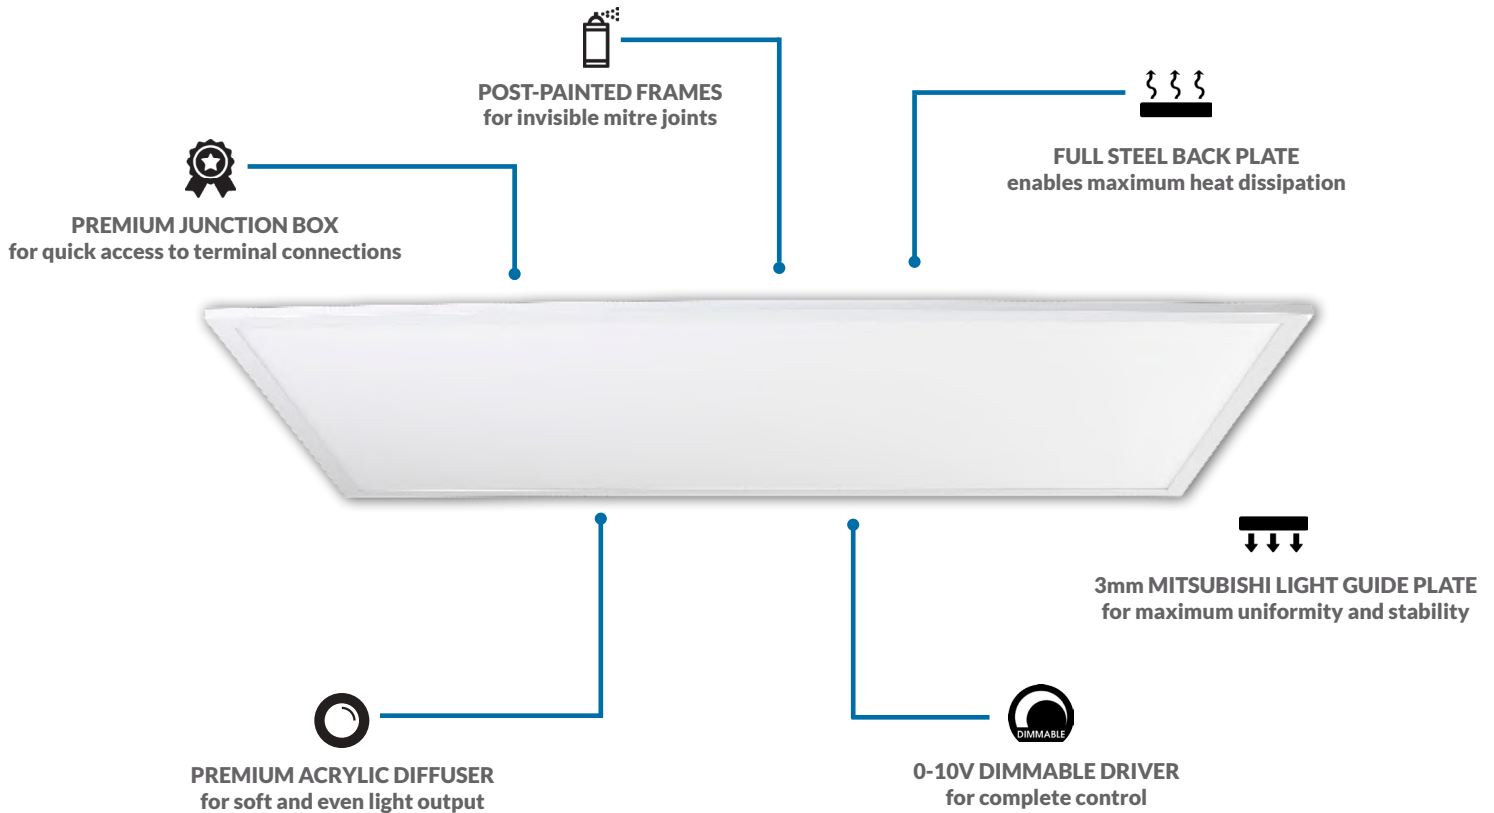

10 YEAR WARRANTY



DESCRIPTION

The FP3 Series LED FLAT PANEL ceiling light is a high performance, commercial grade solution suitable for offices, hospitals, schools, and so much more. Fully dimmable, requiring no warm-up, and producing very little heat, it is an efficient replacement for traditional fluorescent lighting.

OPTIONAL ACCESSORIES



AIRCRAFT CABLES
AC-14



SURFACE MOUNT KIT
SMK-14

POPULAR APPLICATIONS



SCHOOLS



OFFICES




HOSPITALS



OPEN CEILINGS


PRODUCT DIMENSIONS

FP3 PANEL 2x4

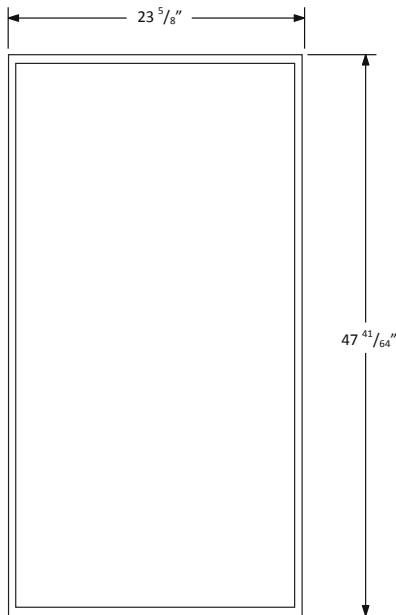



H: 31 3/64"

LED DRIVER





PHOTOMETRIC SPECS/ILLUMINANCE AT A DISTANCE

100-277V

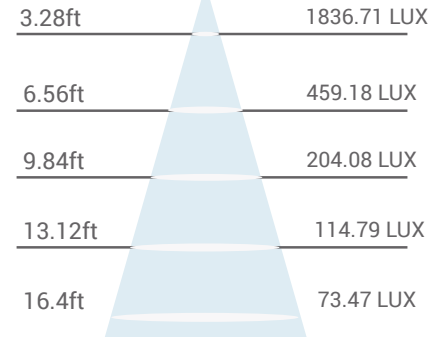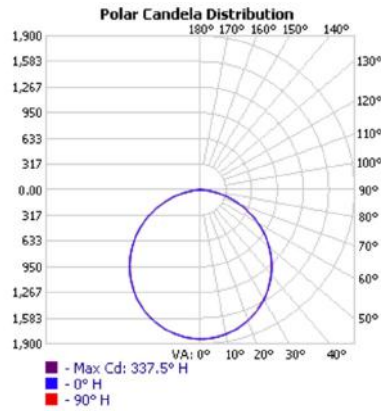

347V

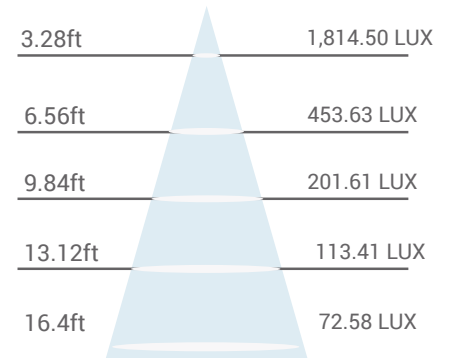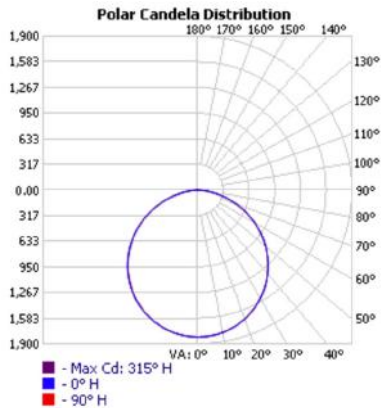

TECHNICAL DATA

LIGHT SPECIFICATIONS

Lumens	5290
Efficacy	126.13 lm/W
CCT	4000K
CRI	≥80.6
Beam Angle	150°

DRIVER

Driver Type	Constant Current
Driver Output	27-42V
Dimmable	Yes
Dimming Type	0-10V

HOURS

Rated Hours	50,000
-------------	--------

ELECTRICAL

Wattage	40W
System Watts	41.94W
Input Voltage	100-347V
THD	17.73%

CONSTRUCTION

Housing Material	ALUMINUM & STEEL
Lens Material	ACRYLIC

LED CHIP

Chip Brand	SA'NAN
Chip Type	SMD2835

TEMPERATURE

Minimum Start	-20°C
Ambient Temp	50°C

DIMENSIONS & WEIGHT

Dimensions	23 5/8" x 47 41/64"
Weight	9.07 KGS

APPROVALS & LISTINGS

ETL	UL-1598
DLC Listed	PLI2VY0JKEYL
IESNA	LM-79 & LM-80