



## INSTALLATION INSTRUCTIONS

For use with:

Premise LED  
HBX1 (120-277V)

### WHAT'S IN THE BOX

- HB-MSX1-1 Sensor
- Lock Nut
- HB-RCX1 Remote

### WHAT YOU'LL NEED (NOT INCLUDED)

- Wire Cutters
- Wiring supplies as specified by electrical
- Wire nuts/Wago Connectors

### IMPORTANT


Before installing this sensor, please make sure that you carefully read through this instruction sheet. Consider having this sensor installed by a qualified licensed electrician.

Refer to spec sheet for how to program.


Premise LED Inc.  
80-86 Carrier Drive  
Toronto, ON Canada  
M9W 5R1  
PREMISELED.COM

# HB-MSX1-1


## INSTALLATION INSTRUCTIONS




1. Detach the driver box by unscrewing the 4 screws.

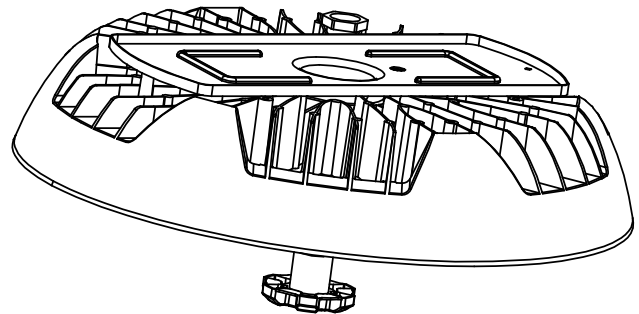

2. Remove the plastic plug by unscrewing the lock nut attached to the screw.

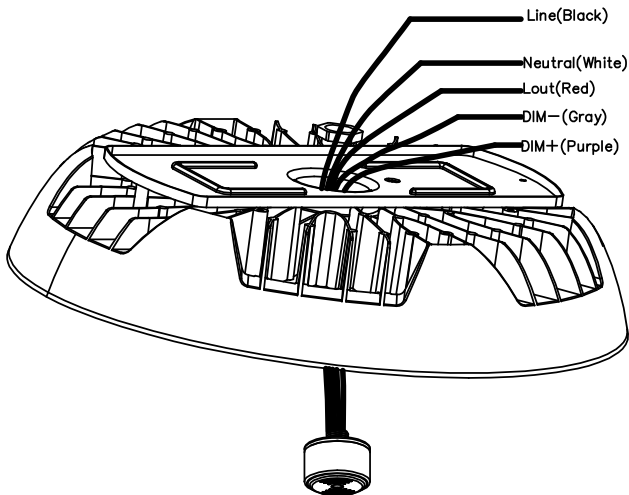

3. Insert the motion sensor through the 1/2" knock out, then screw on the lock nut.

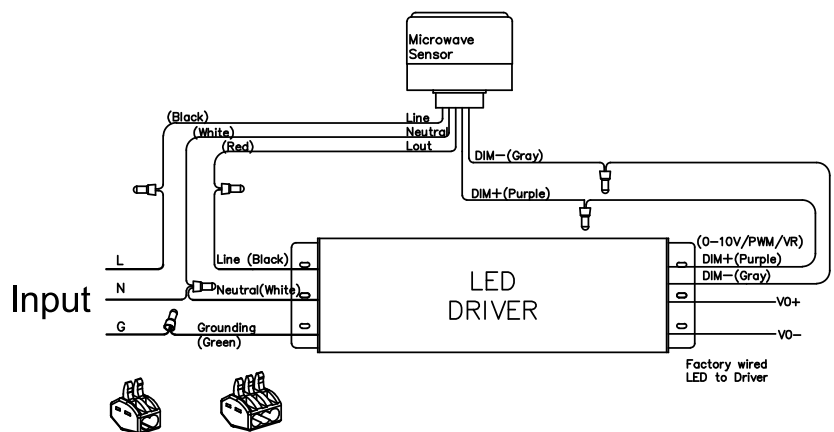

4. Connect the wires according to the wiring diagram. Wago connectors are recommended.