



INSTALLATION INSTRUCTIONS

For use with:

MS1-DHR-SA-4:
Premise LED
HBX1-2 (only 347/480V applications)

WHAT'S IN THE BOX

- Microwave sensor
- Side arm mount
- Screws
- Cable gland

WHAT YOU'LL NEED (NOT INCLUDED)

- Wire Cutters
- Wiring supplies as specified by electrical code
- Wire nuts/Wago Connectors

IMPORTANT

Before installing this sensor, please make sure that you carefully read through this instruction sheet. Consider having this sensor installed by a qualified licensed electrician.


Premise LED Inc.
80-86 Carrier Drive
Toronto, ON Canada
M9W 5R1
PREMISELED.COM

MS1-DHR-SA-4

INSTALLATION INSTRUCTIONS

TO INSTALL THE SENSOR

1. Attach the motion sensor to the side arm mount using the screws provided.
2. Attach the side arm mount to the HBX1 fixture using the screws provided.
3. Remove the 4 screws holding down the driver box.
4. Remove the ½" knockout plug located on top of the driver box and install the cable gland provided.
5. Push the motion sensor wire through the cable gland and tighten.
6. Make the wiring connections according to the wiring diagram below.
7. Reattach the driver box.
8. Set the motion sensor settings using the RC01 remote.

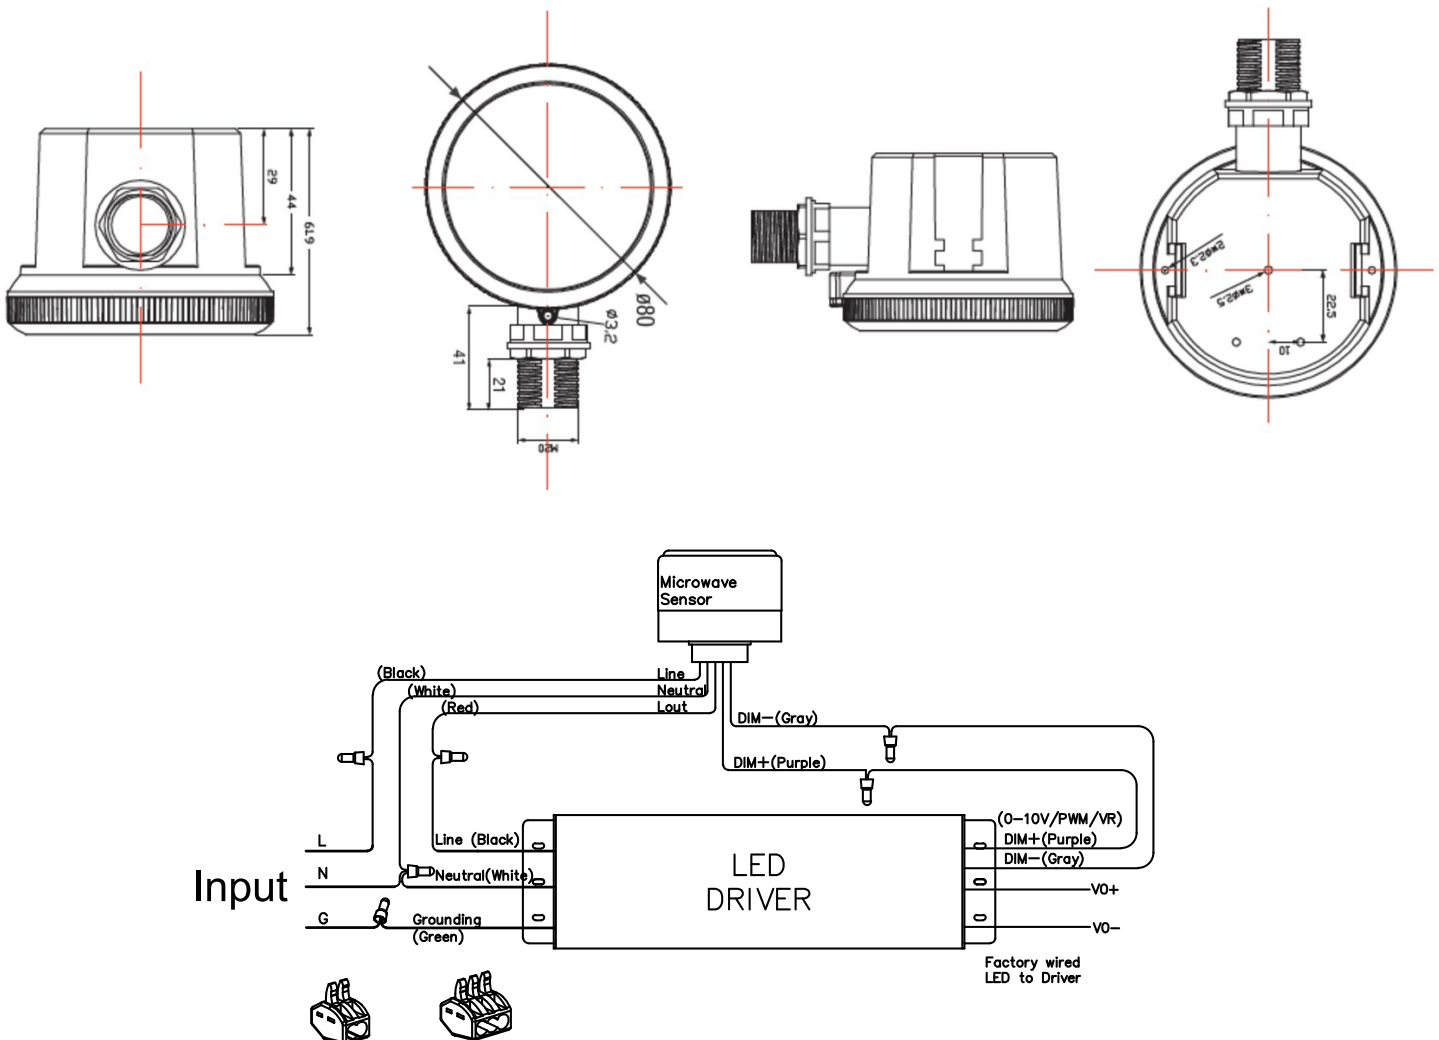

Connect the wires according to the wiring diagram.
Wago connectors are recommended.