



Project	
Date	
Prepared by	
Model #	CF4-404-1

CF4-SERIES DIMMABLE CANOPY FIXTURE



OVERVIEW

These CF4-Series Dimmable LED Canopy Fixture is the ultra-thin, energy-efficient solution for illuminating commercial and industrial environments. Designed with a dropped diffuser lens, the fixture provides maximum lateral light distribution while minimizing glare. As a DLC listed Parking Garage Luminaire, it is perfect for use in parking structures, storage areas, shopping area walkways and entryways.

PRODUCT HIGHLIGHTS

- Aluminum housing with polycarbonate lens
- Suitable for direct surface or pendant mounting
- IP65 rated
- -40°F to 104°F (-40°C to 40°C) operation temperature range
- Bronze finish to match any outdoor environment
- Backed by a worry-free 10 year warranty




OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	4760 lm	Beam Angle (°) ₁	140°
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	50,000 hrs
CRI (Ra) ₁	80	Lumen Maintenance Factor	L70 (70%)
Efficacy (lm/W) ₁	121 lm/W	Chromaticity Shift	+/-25K

ELECTRICAL SPECIFICATIONS

Power	40W	Current Draw at 120V _{AC} (A) ₂	0.33A
Apparent Power (VA)	42VA	Current Draw at 208V _{AC} (A) ₂	0.22A
System Wattage (W)	39W	Current Draw at 240V _{AC} (A) ₂	0.20A
Input Voltage	120-277VAC	Current Draw at 277V _{AC} (A) ₂	0.14A



PRODUCT DIMENSION

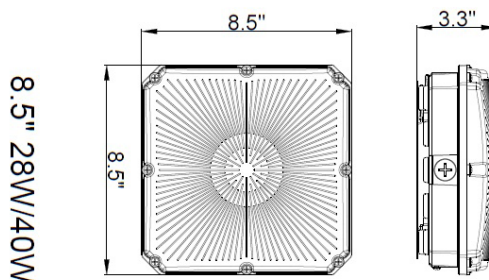

CONSTRUCTION		APPROVALS AND LISTINGS							
Housing Material	Aluminum	DLC Premium	PLDRAPSYVY7K						
Housing Color	Bronze	Wet Location Rated	Yes						
Lens Material	Polycarbonate (PC)	IP Rating	IP65						
Dimensions (inch/mm)	8.5" x 8.5" x 3.26" (216 x 216 x 83 mm)	UL/ETL	cULus						
		UL/ETL File Number	E473127						
Weight	1.5 kg / 3.3 lbs	<table border="1"> <thead> <tr> <th colspan="2">Rated Lifetime¹</th> </tr> </thead> <tbody> <tr> <td>Models</td> <td>Lumen Output = 70% of Initial (L₇₀)²</td> </tr> <tr> <td>CF4-X04-1</td> <td>>50,000 hrs</td> </tr> </tbody> </table>		Rated Lifetime ¹		Models	Lumen Output = 70% of Initial (L ₇₀) ²	CF4-X04-1	>50,000 hrs
Rated Lifetime ¹									
Models	Lumen Output = 70% of Initial (L ₇₀) ²								
CF4-X04-1	>50,000 hrs								
Installation Method	Surface Mount Pendant Mount	<p>1. Rated Lifetime projected the time need for the fixture to drop its lumen output to 70% of its initial value, which was measured based on IESNA LM-79-80 luminaire test report.</p> <p>2. Calculations based on TM-21 Projection and IESNA LM-80-08 LED test report, estimated rated lifetime (hours) at TA=25oC (ambient temperature)</p>							
Operation Range (°F/°C)	-40°C to 40°C / -40°F to 104°F								
Warranty	10 years								

LED AND DRIVER SPECIFICATIONS			
LED (Brand)	Samsung	THD	20%
LED Design Origin	South Korea	Surge Protection	2kV
LED Type	SMD 2835	Inrush Current (A)	50A
Dimmable	Yes (1-10VDC)	Driver Class	Class 2
Out Voltage (VDC)	35-52VDC	Driver Feature	All-around protection: OVP (Over-Voltage Protection), OTP (Over-Temperature Protection), SCP (Short Circuit Protection)
Power Factor	>0.9712		

CANDELA	ILLUMINANCE AT A DISTANCE
---------	---------------------------

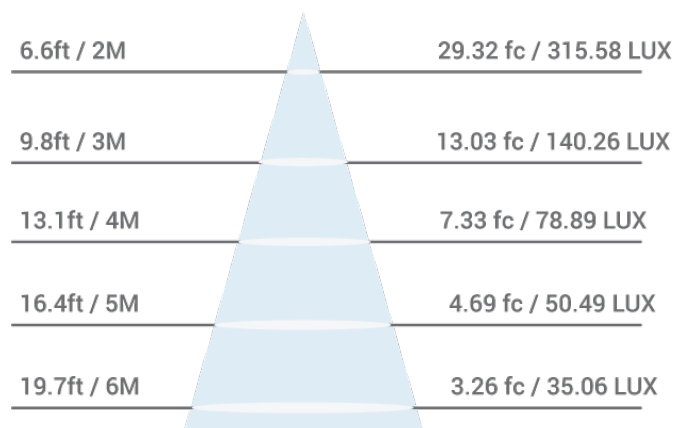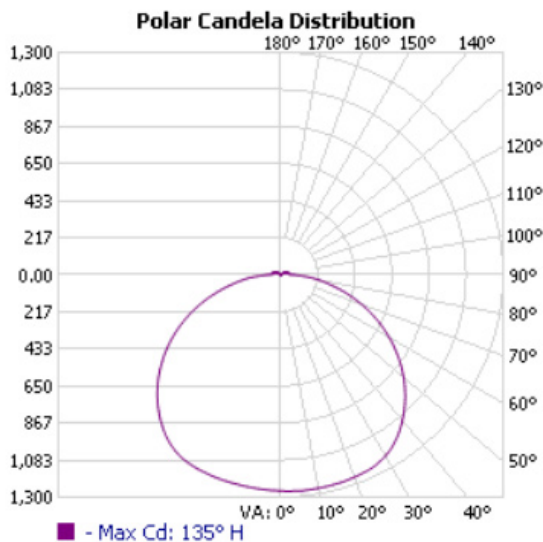

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
 2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
 3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty