

6" Square Super Thin Recessed LED 17W

Type IC, Wet & Air-Tight
DESCRIPTION

6" Square Recessed LED With Integral Driver In Connection Box
Fits Where No Other Recessed Fixture Can


FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Driver Inside Connection Box - No Junction Box Needed
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached
Spring Clips. Ceiling Clearance Required For Driver: 1 1/2"

DIMENSIONS: ID 6 1/8" OD 6 3/4" SQ Cut Out 6 1/8" to 6 1/4"

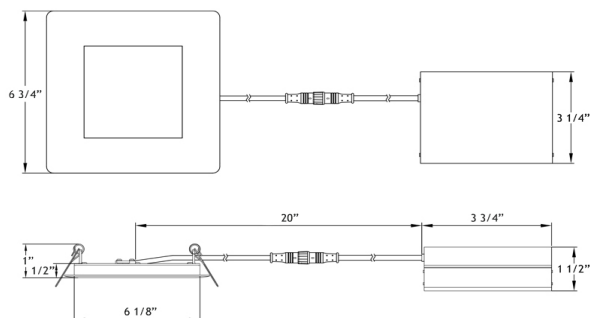


120V TRIAC Dimmable
Driver Included

Optional 120V - 347V
Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD2050T

AVAILABLE TRIMS


White



Black

ORDERING GUIDE Example: **LL6S - 30K - WH**

	CCT	Trim Finish	
LL6S	-	-	
2700K	27K	WH	White
3000K	30K	BK	Black
4000K	40K		

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits		
Energy Used	17 W		
Colour Temperature	2700	3000	4000
Light Output	1000	1050	1100
Halogen Equivalent	100 W		
Beam Angle	110°		
CRI	80		
Default Driver Input	120V AC	Triac Dimmable	
Optional Driver Input	120V-347V AC	0-10V Dimmable	
Power Factor	0.95		
Approved Location	Insulated Ceiling & Wet Locations		
IP Rating	IP 54		
Air Tight	Yes		
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)		
Projected Life	70% Light Output at 50,000 Hours		
Certification	cULus, Energy Star		
Warranty	10 Year on Residential		
	5 Year on Commercial Applications		

ACCESSORIES

Sold Separately



Low Voltage Extension Cables
6ft - cat # **EXC6**, 20ft - cat # **EXC20**
Max 40 ft Allowed. FT4 / CMR rated



26" Flat Rough-In Plates - cat # **RIP6**



13" Flat Rough-In Plate - cat # **MP6-2**



Flanged Rough-In Plate - cat # **FRP6**

COMPLIANCE


**Type IC
Air-Tight**